

Docket No.: CIT/K-132

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of :
Sung Bae JUN :
Serial No. New U.S. Patent Application :
Filed: November 2, 2000 :
For: MULTI-LEVEL POSITION DESIGNATING METHOD FOR A
MULTIMEDIA STREAM

AUTHORIZATION TO TREAT A REPLY AS INCORPORATING
AN EXTENSION OF TIME UNDER 37 C.F.R. §1.136(a)(3)

Assistant Commissioner for Patents
Washington, D. C. 20231

Sir:

The U.S. Patent and Trademark Office is hereby authorized to treat any concurrent or future reply that requires a petition for an extension of time under this paragraph for its timely submission, as incorporating a petition for extension of time for the appropriate length of time under 37 C.F.R. 1.136(a)(3). The U.S. Patent and Trademark Office is hereby authorized to charge all required extension of time fees to our Deposit Account No. 16-0607, if such fees are not otherwise provided for in such reply. A duplicate copy of this sheet is enclosed.

Respectfully submitted,
FLESHNER & KIM, LLP

Daniel Y.J. Kim
Registration No. 36,186

P.O. Box 221200
Chantilly, VA 20153-1200
703 502-9440 DYE/kam
Date: November 2, 2000

09703608.110200
Jc932 U.S. PTO
09/703608
11/02/00

UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)

ASSISTANT COMMISSIONER FOR PATENTS

Box PATENT APPLICATION

Washington D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

INVENTOR OR APPLICATION IDENTIFIER: Sung Bae JUN

FOR: MULTI-LEVEL POSITION DESIGNATING METHOD FOR A MULTIMEDIA STREAM

Enclosed are:

1. [X] 16 pages of specification, claims, abstract
 2. [X] 3 sheets of FORMAL drawing.
 3. [X] 2 pages of newly executed Declaration & Power of Attorney (original).
 4. [X] Priority Claimed to Korean Appln. No. 48903/1999, whose entire disclosure is incorporated herein by reference.
 5. [] Small Entity Statement.
 6. [] Information Disclosure Statement, Form PTO-1449 and reference.
 10. [X] Authorization under 37 C.F.R. §1.136(a)(3).
 11. [] Other:
7. [X] Assignment Papers for LG Electronics Inc. (cover sheet, assignment & assignment fee).
 8. [X] Certified copy of Korean Patent Application No. 48903/1999 filed November 5, 1999.
 9. [X] Two (2) return postcards.
 [X] Stamp & Return with Courier.
 [X] Prepaid Postcard-Stamped Filing Date & Returned with Unofficial Serial Number.

jc585 U.S. PTO



11/02/00

Case Docket No.: CIP

 1c932 U.S. PTO
 03/703608
 11/02/00

CLAIMS AS FILED

For	No. Filed		No. Extra	Rate	Fee
Total Claims	18	- 20	0	X \$18.00	\$0.00
Indep. Claims	3	- 3	0	X \$80.00	\$0.00
Multiple Dependent Claims (If applicable)				X \$270.00	\$0.00
BASIC FEE					\$710.00
TOTAL FILING FEE					\$710.00

[] This is a Continuation-in-part (CIP) of prior application No: _____ filed _____. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

[] Amend the specification by inserting before the first line the sentence:

-This application is a continuation-in-part of Application Serial No. _____ filed _____.-

[X] A check in the amount of \$710.00 (Check #2679) is attached.

[] Please charge my Deposit Account No. 16-0607 in the amount of \$____. A duplicate copy of this sheet is enclosed.

[X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.

[X] Any additional filing fees required under 37 C.F.R. 1.16.

[X] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.

[X] Any patent application processing fees under 37 C.F.R. 1.17.

[X] Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM, LLP

 Daniel Y.J. Kim
 Registration No. 36,186

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440

DTC/mcm

Date: November 2, 2000

**MULTI-LEVEL POSITION DESIGNATING METHOD
FOR A MULTIMEDIA STREAM**

BACKGROUND OF THE INVENTION

Field of the invention

5 The present invention relates to a multimedia browser and more particularly, to a multi-level position designating method for browsing, editing and indexing a multimedia stream.

Description of the Related Art

10 Generally, a user can obtain information while viewing a multimedia stream as it is played. However, because a multimedia stream is a series of continuous frame units, if a user wishes to view a certain portion of a multimedia stream, the user must designate the starting and ending positions of a range of interest in the multimedia stream. Thus, a user interface which
15 allows a user to designate a certain position or range of a multimedia stream is necessary for a user to browse, edit or index a multimedia stream.

20 Particularly, a multimedia stream such as a motion movie, drama, or sports has a running time of at least several tens of minutes. Thus, if a user wishes to skip to a certain position or view a certain range of a multimedia stream, an interface for designating a position or range designating of a multimedia stream is necessary. Also, to generate data such as meta-data and to index information such as casting for a multimedia stream,
25 an interface for designating a position/range of a multimedia

stream would be necessary.

Accordingly, position/range designating methods have been proposed in the related art, in which a user can select a position or range on a multimedia stream by designating a starting and ending positions using a time axis. Fig. 1 shows an example of a position/range designating user interface for a multimedia stream in the related art.

Referring to Fig. 1, an entire multimedia stream A~B is linearly displayed using a scroll bar or slider control, and a range E~F with a starting and ending positions can be designated through an input device. When a range is designated, the user interface displays the starting frame and the ending frame of the range E~F such that a user can determine if the correct range has been selected. As shown, the entire multimedia stream A~B is represented by a one-level display and using the one-level display, the range E~F must be designated.

However, in the above user interface, an entire multimedia stream is displayed by an identical one-level screen as shown in Fig. 1, regardless of the length of the multimedia stream. Therefore, a user would have more difficulty in making a minute or fine selection in a multimedia stream with a longer running time than a multimedia stream with a shorter running time.

For example, assume multimedia stream X has a length of 100 frames and multimedia stream Y has a length of 50 frames. Both multimedia streams X and Y would be represented by a scroll bar

or slider control of a constant length A-B, even though the multimedia stream X has a length twice the length of the multimedia stream Y. Accordingly, assuming that the minimum selection range of the multimedia stream Y is 2 frames, the minimum selection range of the multimedia stream X would be 4 frames. Similarly, the minimum selection range of a multimedia stream having a length of 1000 frames would be 40 frames. Therefore, in such case, a user cannot designate and view a range smaller than 40 frames.

10 In other words, the greater the length of a multimedia stream, the greater the difficulty to make a fine designation of the multimedia stream. As a result, a user must scroll or slide forwards and backwards along the entire multimedia stream A-B in frame units of the minimum range to find a desired position of the multimedia stream. However, the greater the number of scrolling, the greater the period necessary for a user to find a desired position. Particularly, a substantial period of time would be necessary if a moving picture encoding method such as MPEG is used to implement the user interface. Thus, reducing the number of scrolling would improve the efficiency of the position/range designating user interface.

20 As discussed above, a position/range designating method in the related art allows a user to select a position or a range by a designation of the starting and ending positions of a desired range. Here, the designation can be made using an input device

such as a mouse or a keyboard and using an interface such as a scroll bar or a slider control. Also, a scroll bar or slider control of a constant length is used to represent all multimedia stream, making it difficult for a user to make a fine adjustment in selecting a desired position or range.

Alternatively, a starting position and ending position of a multimedia stream can directly be input by a user. However, because the user must know the exact or absolute value, i.e. the frame number, of the position to be designated, it is more difficult for general users to use the direct input method.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to solve at least the problems and disadvantages of the related art.

Another object of the present invention is to provide an efficient and user-friendly position/range designating method for browsing, editing, and indexing a multimedia stream.

A further object of the invention is to provide a position/range designating method which displays a multimedia stream to allow a user to more accurately select a desired position or range of the multimedia stream.

A still further object of the invention is to provide a multi-level position/range designating method for browsing, editing and indexing a multimedia stream.

Additional advantages, objects, and features of the

invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

To achieve the objects and in accordance with the purposes of the invention, as embodied and broadly described herein, a multi-level position/range designating method for a multimedia stream comprises (1) displaying a first level with the entire range of a multimedia stream; (2) setting a designated range from the first level as an absolute range of the multimedia stream and displaying the absolute range in a second level, if a range is designated from the first level; (3) setting a designated range from a previous level as an absolute range of the multimedia stream and displaying the absolute level in a next level, if a range is designated from the previous level; and repeating (3).

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements wherein:

Fig. 1 shows an example of a position/range designating user interface for a multimedia stream in the related art;

Fig. 2 shows an example of a multi-level position/range

designating user interface for a multimedia stream according to
a first embodiment of the present invention; and

Fig. 3 shows an example of a multi-level position/range
designating user interface for a multimedia stream according to
5 a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the present
invention, examples of which are illustrated in the accompanying
drawings. Generally, the present invention allows a user to make
10 a fine or minute selection of a position or range of a multimedia
stream through a user-friendly multi-level display of the
multimedia stream. Thus, the user can easily and efficiently
browse, edit or index a multimedia stream.

Fig. 2 shows an example screen including a multi-level
position/range designating user interface according to the
15 present invention.

Referring to Fig. 2, a first level 0 is set to display an
entire multimedia stream A~B. Thereafter, if a user designates
a range C~D from the range A~B, i.e. the entire multimedia
20 stream, displayed by level 0, a second level 1 is set to display
in detail the designated range C~D as the absolute multimedia
stream. In other words, both the entire multimedia stream A~B
and the range C~D are represented by a scroll bar or slider
control of the same length. Finally, the user can designate a

minute range E~F of the entire multimedia stream A~B using the displayed range C~D as the absolute multimedia stream. Here, the starting frames Fs0 and Fs1, and the ending frames Fe0 and Fe1 for the designated range C~D and E~F are respectively displayed at each level.

Namely, to make a fine or minute selection of a desired range E~F, a user can first approximately designate a general range C~D from level 0 which displays the entire multimedia stream. Thereafter, the user can more specifically designate the desired range E~F from level 1 which displays the range C~D as the absolute multimedia stream.

Therefore, level 0 of the present user interface is set to display an entire multimedia stream range A~B, and if a general range C~D is designated from level 0, the range C~D is considered as an entire multimedia stream, i.e. the absolute multimedia stream, at level 1. That is, a detail representation of the range C~D within the range A~B is displayed. As a result, a range E~F desired by a user can be designated, and if necessary, a third level 2 can further be displayed in which the range E~F would be considered the absolute multimedia stream. Accordingly, multiple level representation of a multimedia stream can be displayed, where each level displays a more detailed but shorter range of the multimedia stream to allow a user to achieve a more minute range designation using more detailed views.

However, if a user continuously wishes to display a more

detailed view of a multimedia stream, the multi-level position/range designating user interface cannot display the required number of levels in the limited display area of a screen. Thus, Fig. 3 shows an example screen including a multi-level position/range designating user interface according to a second embodiment the present invention. Namely, the second embodiment allows an efficient display of a multi-level representation of a multimedia stream in a limited display area.

Referring to Fig. 3, a first window 10 displays a first level which includes a scroll bar or slider control representing an entire multimedia stream, and a starting frame F_s and an ending frame F_e of a range designated from the entire multimedia stream. In addition, a second window 20 displays subsequent levels $\{k, k+1, \dots, k+n\}$, where each level includes a scroll bar or slider control representing a range designated from a previous level as the absolute multimedia stream and includes a starting frame $\{F_{sk}, f_{sk}+1, \dots, F_{sk}+n\}$ and ending frames $\{f_{ek}, f_{ek}+1, \dots, f_{ek}+n\}$ for corresponding to a range designated from the absolute multimedia stream.

In the window 20, previous levels $\{0, 1, \dots, k-1\}$ and subsequent levels $\{k, k+1, k+2, \dots, k+n\}$ can be displayed as necessary by controlling a scroll bar 20a. Although the present embodiment places the scroll bar 20a on the right side of the user interface 20, the scroll bar 20a may be positioned in other locations such as the left side. Also, input interfaces other

than a scroll bar can be used to display the multi-level representations of a multimedia stream.

Thus, a level including a most current and most detailed range designation can be displayed as well as previous levels by manipulating the scroll bar 20a. Accordingly, a user can view different levels with different ranges of a multimedia stream to skip to or view a desired portion of the multimedia stream.

As described above, in the user interface of the present invention, an entire range or a partial range of a multimedia stream can be displayed more efficiently in a limited display area, thereby allowing a more user friendly way for a user to select a desired range of the multimedia stream. Moreover, when compared with a position/range designating interface in the related art having only level 0, the position/range designating interface of the present invention has multi-levels such that even for a lengthy multimedia stream, a general position or range designation and a minute position or range designation of the multimedia stream can be made.

In addition, the position/range designating interface according to the present invention allows an efficient display of the multi-level representations of a multimedia stream using a scroll bar. Finally, there is no limit in the number of levels, such that a user can achieve a minute range adjustment to select a desired range using each level.

The foregoing embodiments are merely exemplary and are not

to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many
5 alternatives, modifications, and variations will be apparent to those skilled in the art.

097036608.110200

What is claimed is:

1. A multi-level position/range designating method for a multimedia stream comprising:

(a) displaying an entire range of a multimedia stream; and
5 (b) setting a range designated by a user from the displayed entire range of the multimedia stream as an absolute range of the multimedia stream and displaying the absolute range of the multimedia stream as the entire range of the multimedia stream, if a range is designated by the user.

10 2. A method of claim 1, further comprising:

displaying a starting frame of the range designated by the user; and

displaying an ending frame of the range designated by the user.

15 3. A method of claim 1, wherein in (a), displaying the entire range of the multiple stream in a first level of a multiple level display of the multimedia stream; and in (b), displaying the absolute range of the multimedia stream in a second level of the multiple level display.

20 4. A method of claim 3, wherein (a) further comprises:

displaying a starting frame of a designated range if a range

is designated by the user; and

displaying an ending frame of said designated range.

5 A method of claim 3, further comprising repeating (b) and displaying each absolute range of the multimedia stream in a different level of the multiple level display.

6. A method of claim 5, wherein (b) further comprises:

10 displaying a starting frame of a range designated from each absolute range of the multimedia in each corresponding level of the multiple level display, if a range is designated by the user from an absolute range of the multimedia; and

displaying an ending frame of said range designated from each absolute range of the multimedia in each corresponding level of the multiple level display.

15 7. A method of claim 6, further comprising manipulating a slider bar to view each level of the multiple level display.

8. A method of claim 5, further comprising manipulating a slider bar to view each level of the multiple level display.

9. A multi-level position/range designating method for a multimedia stream comprising:

20 (a) displaying a first level of a multiple level display

including an entire range of a multimedia stream represented by a first slider bar;

(b) setting a range designated by a user from a range of the multimedia stream displayed in a previous level of the multiple level display as an absolute range of the multimedia stream, and displaying a kth level of the multiple level display including the absolute range of the multimedia stream represented by a kth slider bar, if a range is designated by the user from the previous level; and

(c) repeating (b).

10. A method of claim 9, further comprising:

displaying, for each level, a starting frame of a designated range if a range is designated by the user; and

displaying, for each level, an ending frame of said designated range.

11. A method of claim 10, further comprising manipulating a window slider bar to view each kth level of the multiple level display.

12. A method of claim 9, further comprising manipulating a window slider bar to view each of the kth level of the multiple level display.

13. A method of claim 12, wherein the first slider bar and each of the kth slider bar has the same length.

14. A multi-level position/range designating method for a multimedia stream comprising:

5 (a) displaying a first level of a multiple level display including an entire range of the multimedia stream in a first window; and

10 (b) displaying subsequent levels of the multiple level display including varying ranges of the multimedia stream in a second window.

15. A method of claim 14, further comprising:

displaying, for each level, a starting frame of a designated range if a range is designated by the user; and

15 displaying, for each level, an ending frame of said designated range.

16. A method of claim 15, further comprising manipulating a window slider bar in the second window to view each nth level of the multiple level display.

20 17. A method of claim 14, further comprising manipulating a window slider bar in the second window to view each nth level of the multiple level display.


18. A method of claim 17, wherein the window slider bar is positioned at the right side of the second window.

002011 80920/60

ABSTRACT OF THE DISCLOSURE

A multi-level position or range designating method for browsing, editing and indexing a multimedia stream is disclosed. The present method continuously sets a general range designated by a user from a previous level as an entire multimedia stream for a present level to display a more detailed view of the multimedia stream, such that a user can make a more minute designation of a desired range.

FIG.1
Related Art

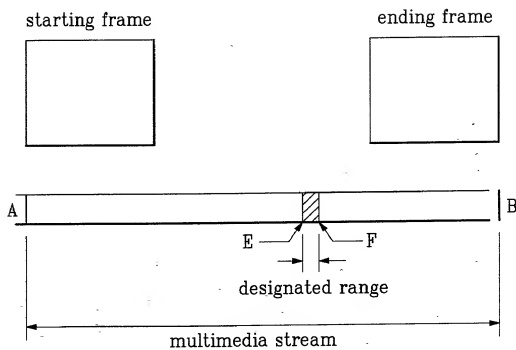

09703600-110200

FIG.2


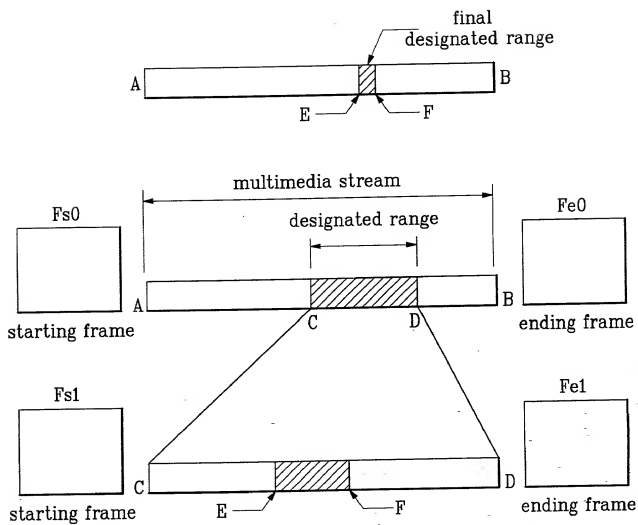


FIG. 3

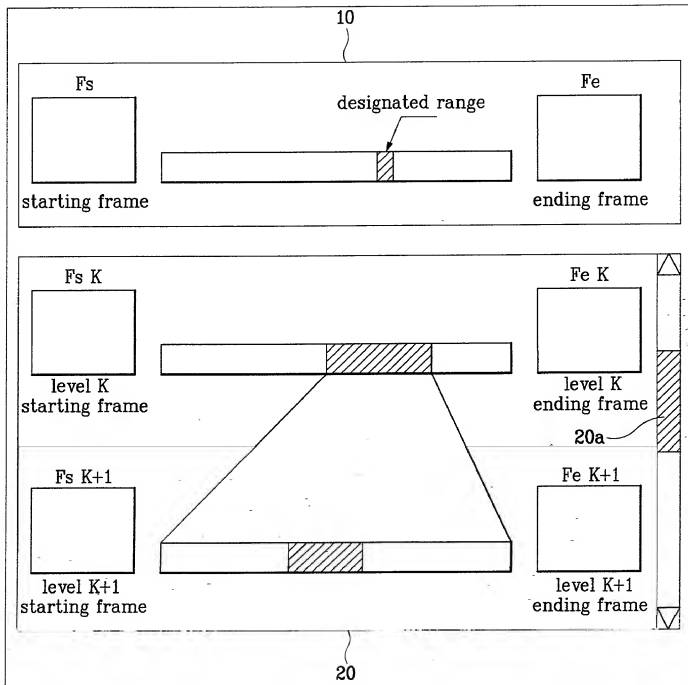

09703608.110200

Docket No.: _____

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled _____

MULTI-LEVEL POSITION DESIGNATING METHOD FOR A MULTIMEDIA STREAM

_____, the specification of which

☒ [X] is attached hereto ☐ [] was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority or provisional application benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate, or provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate, or provisional application(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) or U.S. Provisional Application(s):

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year</u>	<u>Priority Claimed</u>
			<u>Yes</u> <u>No</u>
48903/1999	Korea	November/5/1999	X

_____, I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U. S. Application(s):

Serial No. **Filing Date**

Status: Patented, Pending, Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, Rene A. Vasquez, Registration No. 36,647, all of

The Law Offices of
FLESHNER & KIM
P. O. Box 221200
Chantilly, Virginia 20153-1200

With full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Sung Bae JUN

Inventor's signature:  Date: October 26, 2000

Residence: Seoul, Korea

Citizenship: Republic of Korea

Post Office Address: 804, Shihung4-dong, Kumchon-gu, Seoul, Korea

Full name of joint inventor(s):

Inventor's signature: _____ Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____

Full name of joint inventor(s):

Inventor's signature: _____ Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____
